





BATTERY XS

LED | IP20 |  | CE | 

INSERTING BATTERY PACK

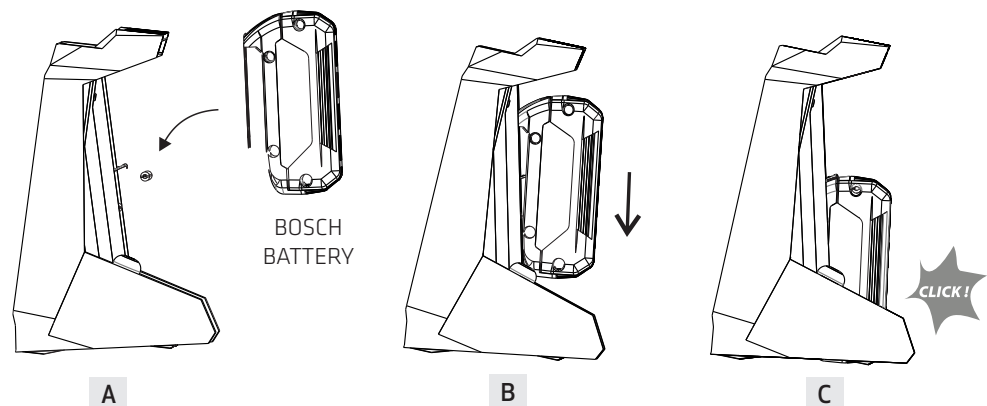


RELEASING BATTERY PACK

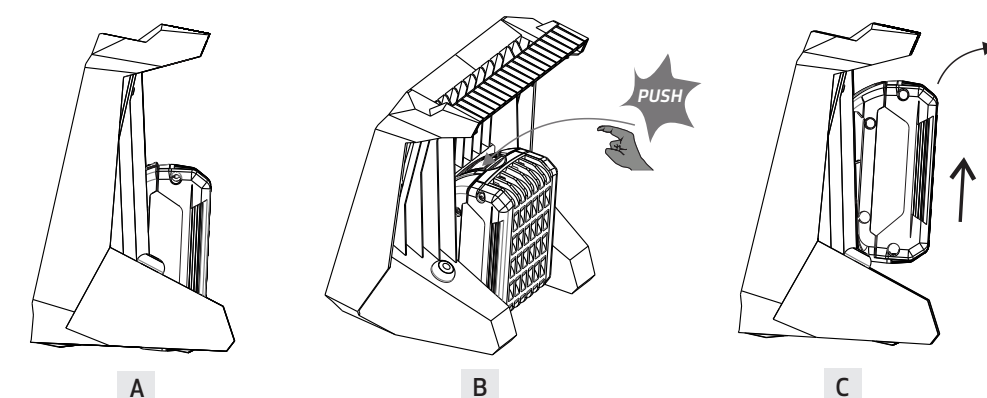

POWER ON

EN **WARNING!** Use only Bosch BAT612 or batteries listed in the battery/charger list. Using other types of batteries may result in personal injury or property damage.

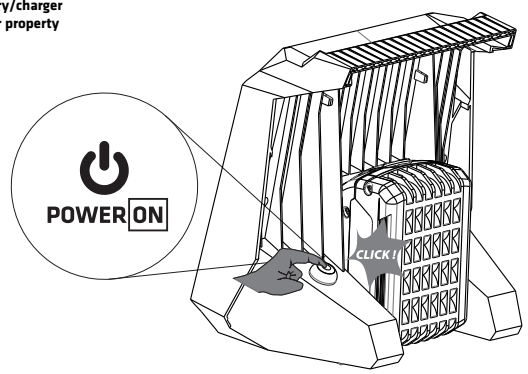


EN **Technical Data:**
Working temperature: 0°- 35°
Protection class III
Not explosion protect.



ACCU STATUS NOTIFICATION



=




+




(...)

AUTOMATIC FLASHING ON/OFF (...)

OPTIONAL MOUNTING

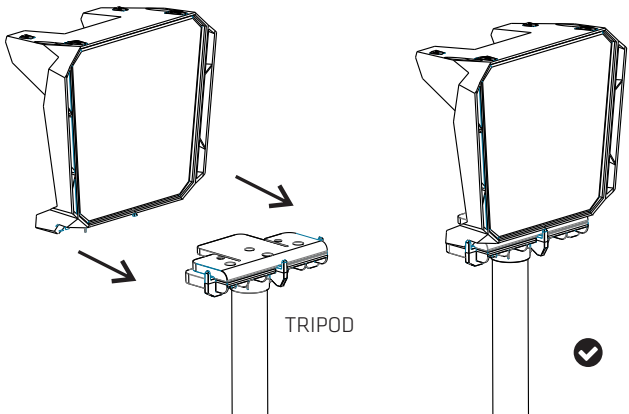


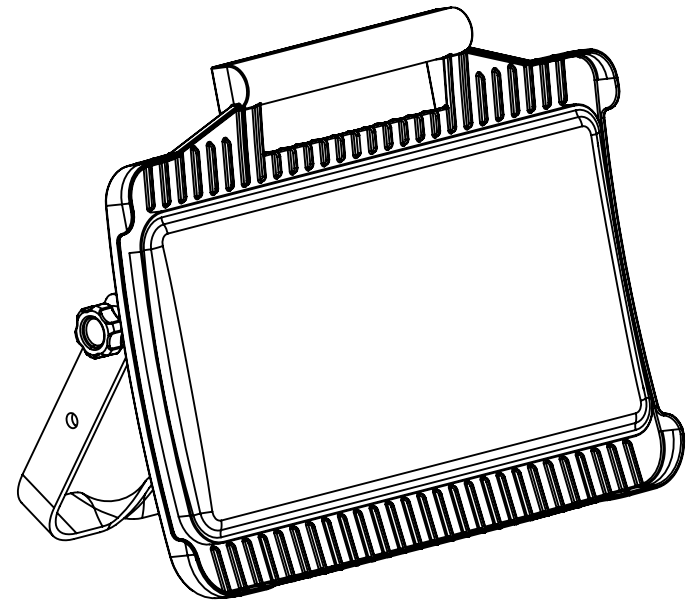


BATTERY M

LED | IP20 |  | CE | 


INSERTING BATTERY PACK



A




B




C


RELEASING BATTERY PACK



A

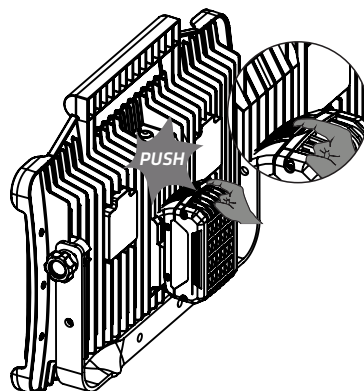


B





C

ADJUSTMENT

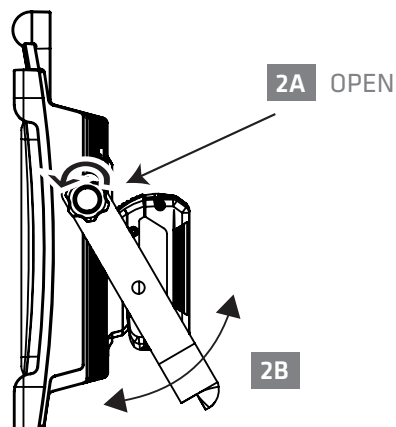

POWER ON

EN WARNING! Use only Bosch BAT612 or batteries listed in the battery/charger list. Using other types of batteries may result in personal injury or property damage.



EN Technical Data:
Working temperature: 0°- 25°
Protection class III
Not explosion protect.


x1	x2	x3	x4	x5
500 lm	1850 lm	2750 lm	4050 lm	OFF

ACCU STATUS NOTIFICATION




10%

=



REDUCE LIGHT OUTPUT TO 500 lm

+



ON


OFF
0,1s

ON
60s


(...)


AUTOMATIC FLASHING ON/OFF (...)

OPTIONAL MOUNTING

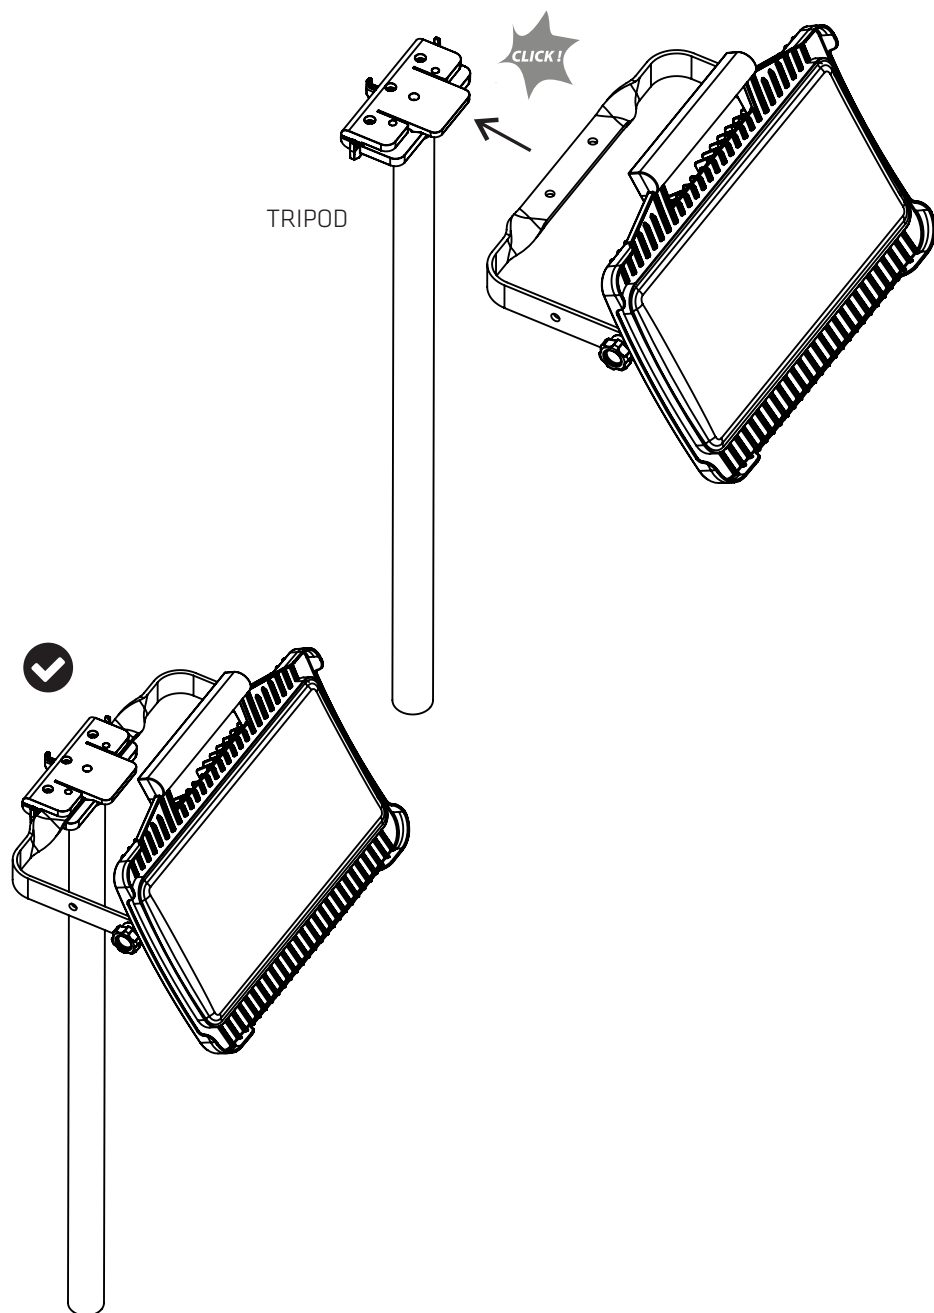

LONG ARM VERSION

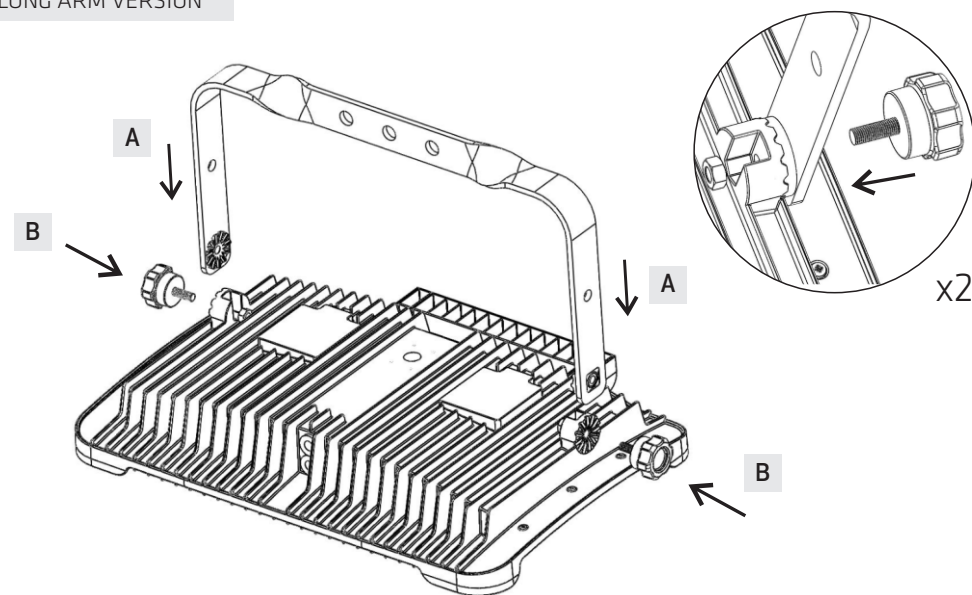


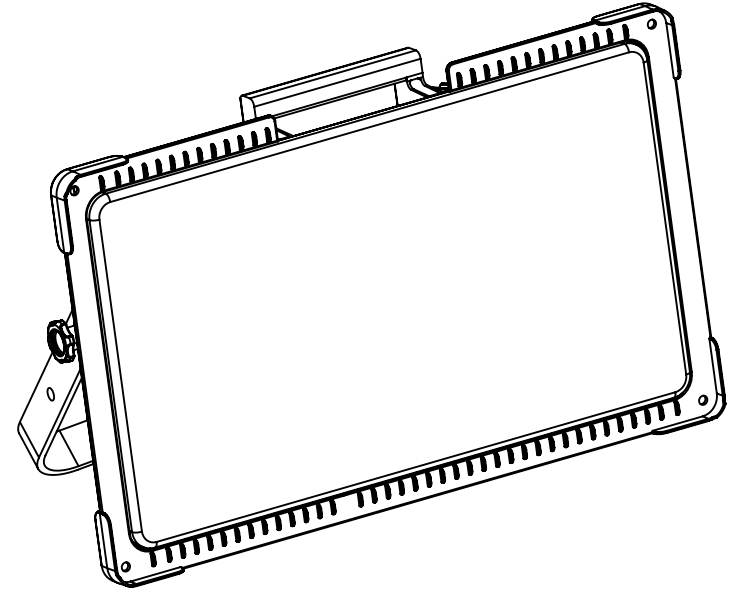


BATTERY L

LED | IP20 |  | CE | 


INSERTING BATTERY PACK



A




B




C


RELEASING BATTERY PACK



A

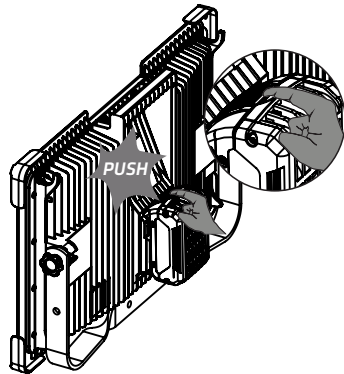


B

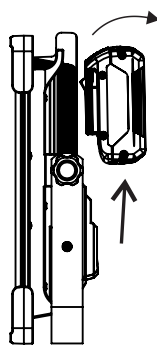



C

ADJUSTMENT



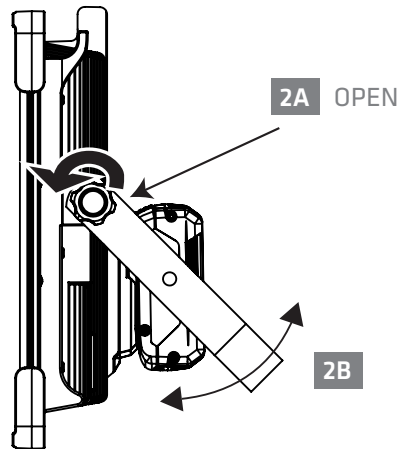


POWER ON

EN WARNING! Use only Bosch BAT612 or batteries listed in the battery/charger list. Using other types of batteries may result in personal injury or property damage.

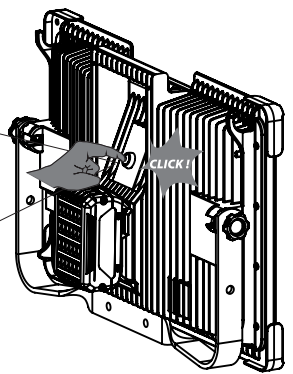


EN Technical Data:
Working temperature: 0°- 25°
Protection class III
Not explosion protect.

 x1	 x2	 x3	 x4	 x5
1000 lm	3800 lm	5650 lm	9250 lm	off
				


ACCU STATUS NOTIFICATION



=



+

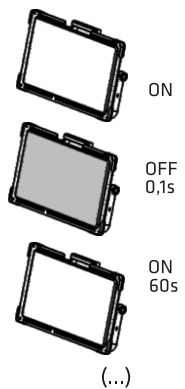


REDUCE LIGHT OUTPUT TO 520 lm

AUTOMATIC FLASHING ON/OFF (...)

OPTIONAL MOUNTING

TRIPOD

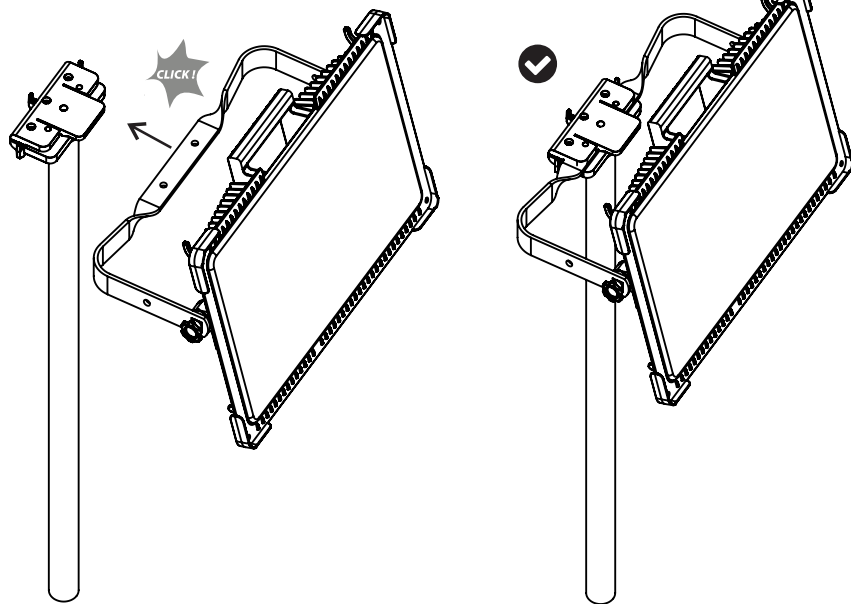

LONG ARM VERSION

